


Hand Chain Hoist

1/2 to 10 Metric ton Capacity

FEATURES


- ▶ Hand chain opening is formed with radius allowing operation from side or even above, permitting use for lifting or pulling.
- ▶ Hand chains and load chains are Zinc plated.
- ▶ Available in lifts of 10, 20 and 30 feet. Custom lifts/drops available.



1/2 - 2t
(1 part)



3t & 5t
(2 part)

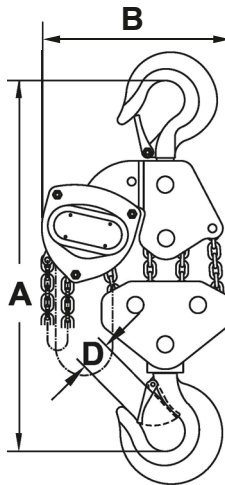

10t (4 part)



Option: V= Overload Protection

How to Order: By descriptive model number

Example: Model CB030-20-18V = 3t hoist with 20' 18' drop, overload protection

SPECIFICATIONS AND DIMENSIONS (inches and pounds unless noted)

Base Model#	WLL Metric ton	Weight (lbs) 10 Lift	Chain# & Size (mm)	Load Chain Lb.Ft.	Hand Chain Lb.Ft.	Effort P (lbs.) @ WLL	Falls	A	B	C	D with latch
CB005	0.5t (1100 lbs)	22	C6X18ZC	0.54	0.38	45	1	10.6	5.4	5.4	1.10
CB010	1t (2200 lbs)	26	C6X18ZC	0.54	0.38	72	1	13.4	6.4	5.8	1.02
CB015	1.5t (3300 lbs)	42	C8X24ZC	0.92	0.38	81	1	15.7	7.2	6.7	1.28
CB020	2t (4400 lbs)	44	C8X24ZC	0.92	0.38	82	1	16.3	7.6	6.7	1.26
CB030	3t (6600 lbs)	59	C8X24ZC	1.84	0.38	87	2	20.9	8.7	6.7	1.46
CB050	5t (11000 lbs)	101	C10X30ZC	2.96	0.38	98	2	25.0	11.3	7.5	1.80
CB100	10t (22000 lbs)	183	C10X30ZC	5.92	0.38	98	4	29.3	15.1	7.5	1.97



Before using these products; read and follow instructions in the operator's manual. Never exceed capacity. Do not use for lifting people or loads over people.